

SINVAC

Sinvac Sales Office
132 Bessemer Street
Industrial Sites
Pretoria West 0117
TEL: +27 (12) 386 6484


www.sinvac.co.za



@SinvacPlasticsSince1962



@sinvac-group-of-companies

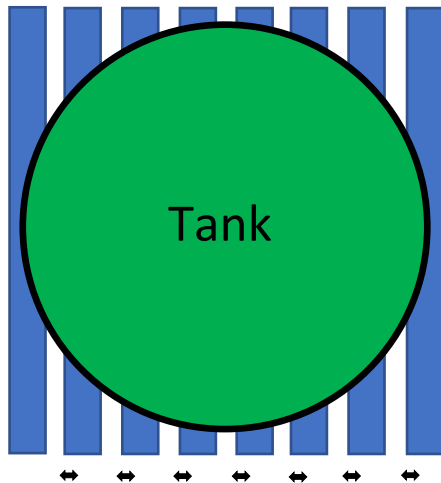

Tank platform beams should not be more than 50mm apart. Surface should be level. Tank must not overhang, allow for 50mm clearance of tank from edge of platform. Platform length and width should be at least 100mm larger than the diameter of the tank.

WATER & CHEMICAL TANKS: 10 YEAR MANUFACTURING WARRANTY



THE FOLLOWING CONDITIONS APPLY:

- The warranty is limited to our roto moulded LLDPE tanks/products.
- Products/tanks are guaranteed to be free of manufacturing defects.
- The warranty on the tanks is subject to the correct INSTALLATION (see instructions below).
- Any damage sustained during transportation, storage and installation is not covered by the warranty. Liability for other losses or subsequent damages are excluded.
- Any product modifications are not covered.
- The tanks are designed to be used for water and chemicals that have a specific gravity suitable for the tank.
- Any liquid poured in the tank must be compatible with LLDPE used in making the tanks. The salesperson will advise upon request. We recommend that customers carry out the relevant test to ensure that the plastic resin is compatible with the intended application. We have no control over the chemistry of the plastic, which in its nature is not stable, we do take very care to ensure that the raw materials used are of high quality from reputable source.
- The warranty is limited to:
- Applications where the liquid contents do not exceed 40°C.
- All vertical tanks are to used stationary when filled. They are not to be moved when filled, i.e. they must be emptied before moved.
- to the replacement of the tank only at discretion of Sinvac Pty Ltd. Transport to and from Sinvac and any other structural costs are for buyer's account.
- To any repairs done by Sinvac personnel only.
- Correct fittings are used. No steel or iron fittings or connectors to be used.
- The polyethylene used has a design UV protection of 8 years.
- Sinvac Pty Ltd, its employees, subsidiaries, contractors, and the likes are hereby indemnified by the customer for any damages suffered, of whatsoever nature in the collection, delivery, installation and/or utilization of the tanks.
- All claims made in the guarantee period require proof of purchase.

GENERAL LIFE EXPECTANCY FOR WATER & CHEMICAL TANKS:

- When properly installed and maintained the tank life expectancy can reach up to 30 years and beyond. Better manufacturing techniques throughout the years have increased the life expectancy.
- By strictly following the installation instructions and by requesting a higher SG (Specific Gravity) rating which will increase the wall thickness of your tank, you improve the life expectancy by slowing down the decaying process.

INSTALLATION INSTRUCTIONS:

- The tank shall be mounted on a level, firm base with no overhang and be strong enough to carry the FULL weight.
- The tank may not be mounted on a sand or ground base but on a firm, level strong concrete or similar base.
- The base beams should be strong enough and no more than 50 mm apart and should be treated against weathering.
- The stand should be firmly placed and strong enough to carry the weight of the full tank.
- The tank shall be adequately secured to the stand but not to distort the tank.
- The correct fittings are to be used. No steel or iron fittings or connectors. The fittings should also be suitable for the liquid in the tank.
- The pipes attached to the fittings shall be firmly secured and not hang on the tank. They should also be supported.
- Any "point load" should be avoided.
- The in-flow rate should not exceed the out-flow or overflow rate.

